


MODEL VARIANTS

K WIRES AND GUIDE WIRES

31-XX-XX-XXXX

Description article-number

31-XX-XX-XXXX

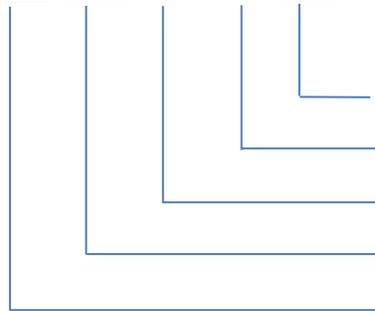

Model

02 = Trocar / Round

Diameter

22 = 2,2 mm

Length

101,6 mm = 10 / 14,6 cm = 15

Material

61 = Standard

Art. Nr.

K-Wire / Guide-Wire

Example:

31-61-10-2202

Art-Nr.:

31 → K-Wire / Steinmann Pins

Material-Nr.:

- 61 → Standard (Implant steel 1.4441 (316LVM))
- 62 → Titan anodized / Blue (Ti6Al4V)
- 63 → Titan / Natural (Ti6Al4V)
- 64 → Nitinol / NiTi#1
- 65 → CoCrMo

Length in mm:

10 to 1000

At intermediate lengths always round on to two digits.

- 95,00 – 104,00 = 10 / 101,6 = 10

Diameters:

K-Wires:

Ø 0,5 – 3,0 mm

Steinmann – Pins:

Ø 3,1 – 6,35 mm

, Nummer und Name	erstellt/geändert	2018-06-05	freigegeben/geprüft	2018-06-05	Seite / Seiten
I:\Technische_Dokumentationen\160000_Kirschner_Draht\Konstruktion\07030119_Modellvarianten_Bohrdraehnte_Englisch.docx					1 / 3

MODEL VARIANTS


K-WIRES AND GUIDE-WIRES

31-XX-XX-XXXX

Minimum diameters:

- For fully threaded: Ø 1,6 mm
- For eyelet: Ø 1,7 mm
- Straight knurl: Ø 2,0 mm
- For variant with drill spiral: Ø 2,4 mm

Variants:

			Model	
...	/ Round			31-xx-xx-xx02
...	/ Ball			31-xx-xx-xx37
...	/ Trocar			31-xx-xx-xx03
...	/ Flat			31-xx-xx-xx01
...	/ Flat with hole			31-xx-xx-xx06
...	/ Triangular			31-xx-xx-xx04
...	/ Square			31-xx-xx-xx05
With 15mm partial thread	/ Round			31-xx-xx-xx26
With 15mm partial thread	/ Ball			31-xx-xx-xx45
With 15mm partial thread	/ Trocar			31-xx-xx-xx35
...	/ Trocar with 15mm partial thread each			31-xx-xx-xx33
With 15mm partial thread	/ Flat			31-xx-xx-xx70
With 15mm partial thread	/ Triangular			31-xx-xx-xx34
Fully threaded	/ Round			31-xx-xx-xx82
Fully threaded	/ Ball			31-xx-xx-xx38
Fully threaded	/ Trocar			31-xx-xx-xx95
Fully threaded	/ Flat			31-xx-xx-xx81

Trocar

MODEL VARIANTS

K-WIRES AND GUIDE-WIRES

31-XX-XX-XXXX

Lancet

... / Round			31-xx-xx-xx12
... With hole / Round			31-xx-xx-xx20
... / Ball			31-xx-xx-xx16
... / Lancet			31-xx-xx-xx13
... / Lancet with one hole each			31-xx-xx-xx43
... / Flat			31-xx-xx-xx11
... / Flat with hole			31-xx-xx-xx19
... / Triangular			31-xx-xx-xx14
... / Square			31-xx-xx-xx15
... With 15mm partial thread / Round			31-xx-xx-xx17
... / Lancet with 15mm partial thread each			31-xx-xx-xx42
Fully threaded / Lancet			31-xx-xx-xx18

Combined

			Model
Trocar / Special eyelet			31-xx-xx-xx90
Trocar / Special eyelet – transverse hole			31-xx-xx-xx94
Trocar / Lancet			31-xx-xx-xx49
Trocar / Lancet with hole			31-xx-xx-xx48
Trocar / Lancet with 15mm partial thread			31-xx-xx-xx50
Trocar straight knurled / Round			31-xx-xx-xx55
Trocar straight knurled / Special eyelet			31-xx-xx-xx91
Drill tip / Round			31-xx-xx-xx92
Drill tip / Special eyelet			31-xx-xx-xx93
Guide-wire Ball / Ball			31-xx-xx-xx23
Eli / Round			31-xx-xx-xx97